

## BD55 Roller Garage Door

Insulated Roller Garage Door



**Fit:** Internal, reveal fit or external face

**Popular Use:** Domestic, perfect for a space with limited headroom.

**Security Level:** Medium Security

**Slat Options:** Twin wall 55mm aluminium slat with foam filled insulation.

**Maximum Width:** 2800mm

**Finish:** Over 20 standard colours, option to window match on request.

**Included features:** Remote control panel with built in courtesy light. 2 remote key fobs, safety edge system with the option of an integrated alarm. Manual override and safety brake system as standard.

**Operation Options:** Electric Tubular Motor

All of our roller shutters come with built in or added safety brake systems as standard. All have manual override options, customised to suit your application. The doors can be operated in various ways, to suit you and your environment.

Optional upgrades to smart devices on request.

### Curtain Specification


**Curtain weight per m<sup>2</sup>:** 4.2kg

**Maximum Surface Area:** 7.84m<sup>2</sup>

**Box:** Rectangular aluminium box with aluminium end plates. This provides additional strength within the door structure; hiding mechanical moving parts, ensuring the door is aesthetically pleasing during and after operation. This can be powder coated to any RAL or slat colour for a surcharge.

**Guides:** 65mm. Heavy duty aluminium guide channels with built in brush strips to improve smooth operation and heat loss.

| Guide Height (mm) | Plate size (mm) |
|-------------------|-----------------|
| 2100              | 205             |
| 2500              | 250             |

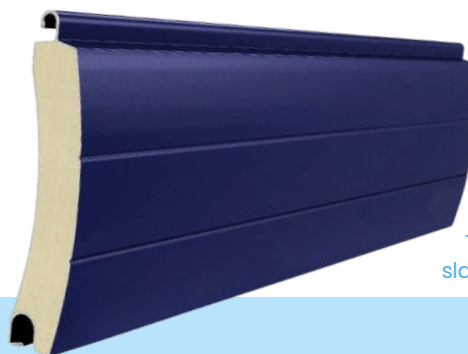

Twin wall 55mm aluminium slat with foam filled insulation